


Customizing Patches and Modules

Basic Patch Menu

You already learned how to insert a module: right-click on the background of the patch window, and select 'Insert Module'. This menu is the patch menu:

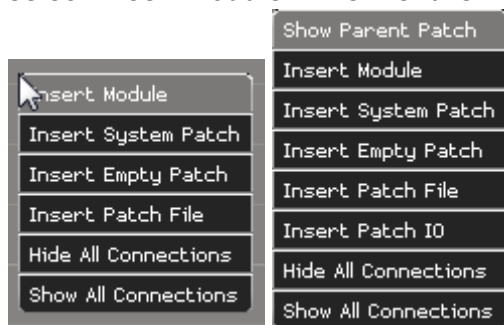

- **Insert Module** lets you select a module, sorted in sections, to be inserted
- **Insert System Patch** lets you insert a system patch. System Patches are patches which are deemed important enough to be shipped with the software - they simply live in `Distrib\Patches\System`.
- **Insert Empty Patch** adds an empty patch, represented by a small grey rectangle. Double-click it to open it, or to 'fly' down into it.
- **Insert Patch File** opens a file explorer in order to navigate to another patchfile which can be inserted here
- **Hide All Connections** hides all already patched 'wires'. This is useful for patches with many connections. Even with the connections hidden, hovering the mouse over a port temporarily shows its connection(s).
- **Show All Connections** makes all connections visible again.

In order to save a patch, specifically select the patch window and select `File/Save as` from the top menubar - this makes sure this patch is saved in a separate file. If you don't do this, the patch is stored in the stage patch of this very project, but is no available for other projects.

Arranging Patches and Modules

Select

- In order to select one module/patch, simply click it - either at its background or its titlebar
- In order to select a group of modules/patches, draw a selection box around them (click in one corner, hold the mouse button, move diagonally for a rectangle, release mouse button)
- In order to move the entire viewport of the patch window hold the spacebar pressed and drag the contents with the mouse, or - with nothing selected - repeatedly hit the arrow keys (up/down/left/right)

Move

- in order to move one module/patch, click it, with the mouse button down move it to the target location, release it
- in order to move a group of modules/patches, draw a selection box around them, click one of the selected items, with the mouse button down move it to the target location, release it

Delete

Select one or more items you want to delete and hit the Delete key.

Copy

Ctrl-C and Ctrl-V do work here as well: select one or more items, press Ctrl and C to copy, then press Ctrl and V to paste the items - in the same or another patch window.

Undo/Redo

- Ctrl + z undoes the last step, and can be repeated to go back several steps
- Ctrl + Shift + z redoes the last step, and can be repeated to go forward several steps

Rename

Double-click in the title, or behind it in the titlebar, in order to edit the title of a module or patch.

Resize

Grab and draw one of the edges of a module/patch in order to resize it.

The Module Menu

Right-clicking a patch or module brings up its context menu (the menus for patches and modules are rather similar):

Expand Patch	Show Port
Show Port	Show Parameter
Remove Port	Load Default Skin
Show Parameter	Load Alternate Skin
Remove Parameter	Save to Alternate Skin
Reset Skin	Reset Skin
Module Help	Module Help

- **Expend Patch** (patches only) is the same as double-clicking the patch. It opens in a new window or you 'fly down' in it.
- **Show Port** displays ports which are not yet shown, e.g. hidden or not in this skin
- **Remove Port** (patches only) removes a port. When removed, you cannot bring it back in, unless you re-wire it to the underlying Patch I/O. This is different to the **Ctrl Delete** thing described below as that can be revoked with **Show Port** or **Reset Skin**.
- **Show Parameter** is similar to **Show Port** but works on controls which are exposed via their control options/Add to Parent Panel
- **Remove Parameter** (patches only) is similar to **Remove Port**. When removed, in order to bring a parameter back in, you need to select its Control Options/Add to Parent Panel again.
- **Load Default Skin** (modules only) loads the default skin (a predefined surface - each module can have various such skins)
- **Load Alternate Skin** (modules only) loads another such skin (module surface) - shows a list of available skins for this module
- **Save to Alternate Skin** (modules only) saves the current surface as another skin which can later be recalled with **Load Alternate Skin**
- **Reset Skin** resets the skin, i.e. resizes the rectangle to its original dimensions, shows ports and parameters which have been deleted with **Ctrl Delete**, and neatly arranges ports and parameters.
- **Module Help** opens the help (the aforementioned `Distrib\Help\Ai_Man_v8.chm`)

Tweaking controls and ports

Controls and ports cannot be tweaked with simple mouseclicks as they are meant to register the click itself and act accordingly. Here are the keyboard/mouse combinations:

- to select one control or port, hold down **Ctrl** and click the item
- to select some controls/ports, hold down **Ctrl** and draw a selection box
- to delete one or more controls/ports, select them as described and press **Delete**
- some operations on control/port level cannot be made undone. The way back in that case is: left-click the module and select 'Load Default Skin' - but this really resets the entire thing. Hence be careful when adjusting/deleting controls and ports. Another - more subtle - way is left-click and 'Show Port' resp. 'Show Parameter' - but you need to know the name of the item you have deleted.
- to change a label of a port or control, hold down **Ctrl** and double-click the label
- my absolute favourite: in order to resize a control (e.g. buttons, faders, text areas, dropdown lists) hold down **Ctrl**, place the mouse close to the bottom or right edge of the control (close means: a few pixels away from it), and press the left mouse button. If you hit the right spot the cursor will show arrows and you can drag the edge in order to resize the control.

From:

<https://www.avosupport.de/wiki/> - **AVOSUPPORT**

Permanent link:

https://www.avosupport.de/wiki/ai/customising_modules?rev=1539458816

Last update: **2018/10/13 19:26**

