Web API example


Cuelist Cue Viewer

Show a cuelist's cues. This might be useful for a theater where you have someone to read the cues for you.


author, date	Sebastian Beutel, September 2021
published	https://www.avolites.de/downloads/icke_siegen/ViewCues/
prog. lang./ framework	HTML, JS, CSS; none (wrote everything with a text editor
description	Shows a cuelist's cues with their legends and notes. Idea from https://www.facebook.com/groups/Avolites/posts/2317601988372022/
other requirements	e.g. a web browser is required


Video

(not yet uploaded)

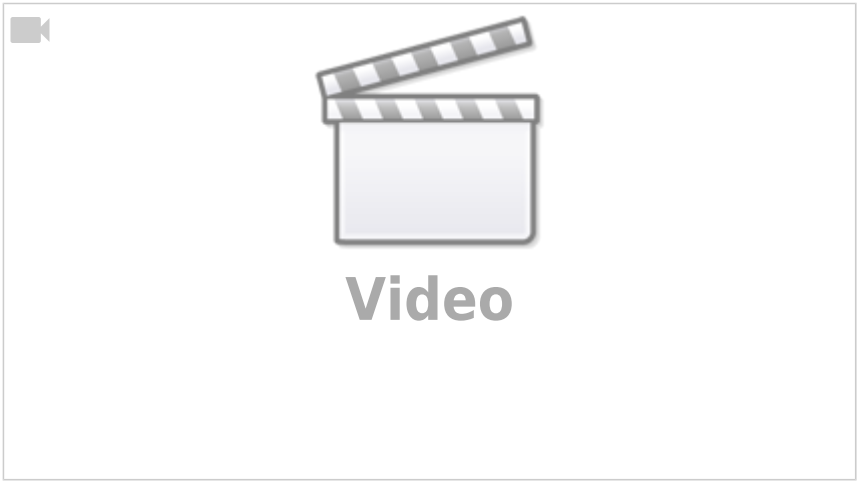

Screenshots

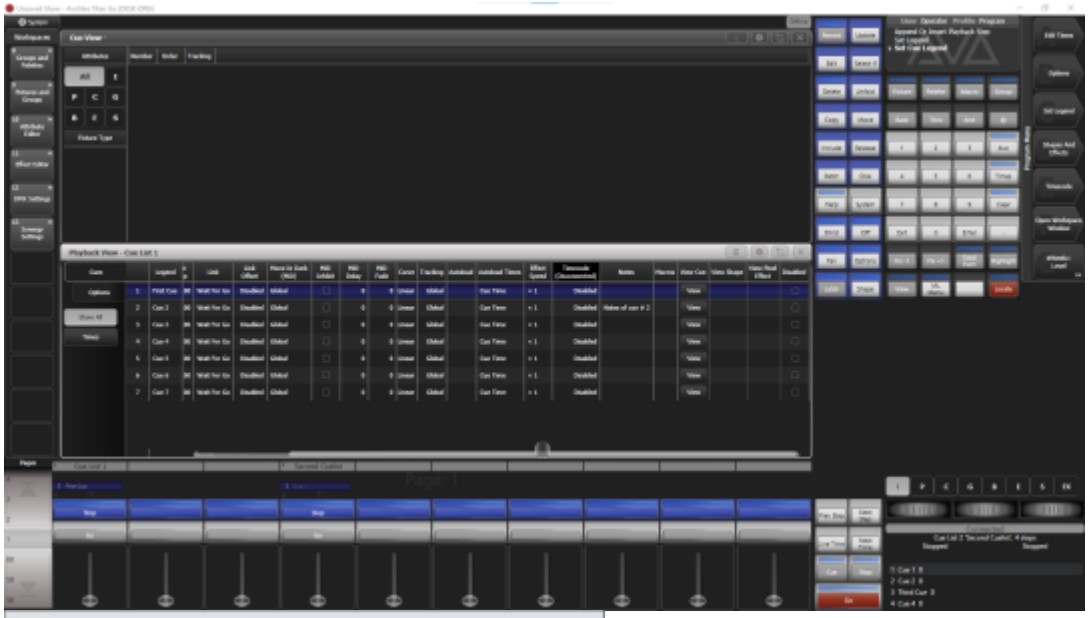

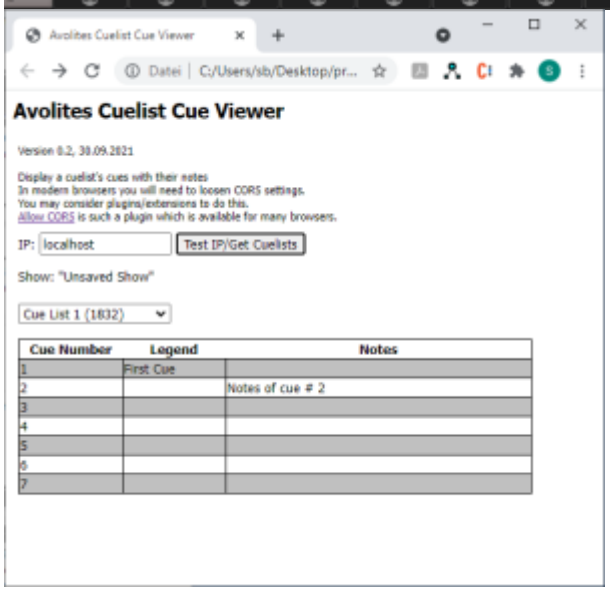

How it works

`Initialize` reads all the current playbacks and puts them into an array.

`Show Playbacksarray` shows the current contents of this array.

`Start Legend Rewrite` starts the real process: every second the playbacks are requested and compared to the playback array. If a playback is not in the array - which means it is new - its legend is set to the current time.

API Requests

- System/SoftwareVersion

- Handles
- Handles_SetSourceHandleFromHandle
- ActionScript_SetProperty_String
- Handles_SetLegend

From:
https://www.avosupport.de/wiki/ - **AVOSUPPORT**

Permanent link:
https://www.avosupport.de/wiki/webapi/examples/cuelistcueviewer?rev=1633010541

Last update: **2021/09/30 14:02**