Web API example

Playback Timestamp


Automatically sets legends of new playbacks to the current timestamp.


author, date	Sebastian Beutel, September 2021
published	https://www.avosupport.de/downloads/icke_siegen/PB%20Timestamp/
prog. lang./ framework	HTML, JS, CSS; none (wrote everything with a text editor
description	Automatically sets legends of new playbacks to the current timestamp. Idea from https://www.facebook.com/groups/Avolites/posts/2303543733111181/
other requirements	e.g. a web browser is required

Video



Screenshots

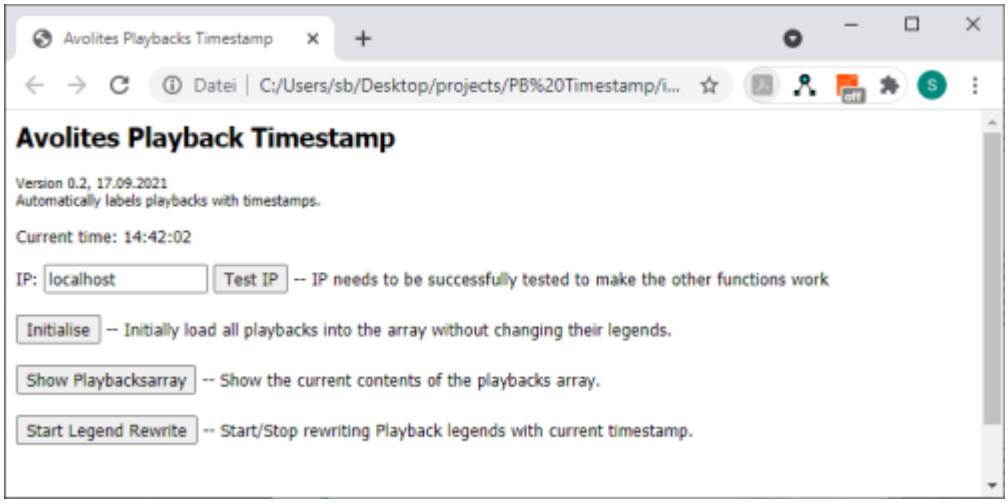

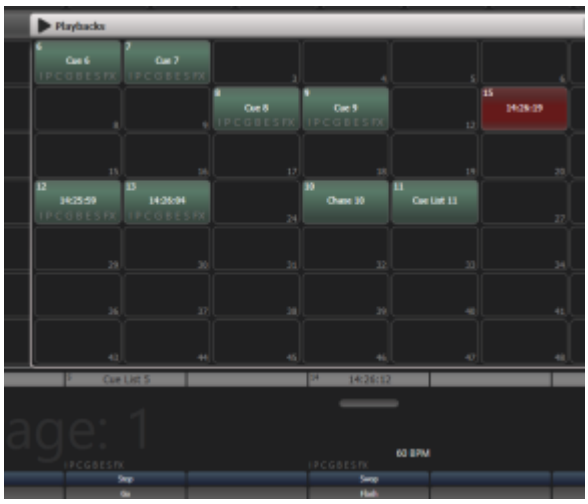

How it works

`Initialize` reads all the current playbacks and puts them into an array.

`Show Playbacksarray` shows the current contents of this array.

`Start Legend Rewrite` starts the real process: every second the playbacks are requested and compared to the playback array. If a playback is not in the array - which means it is new - its legend is set to the current time.

API Requests

- System/SoftwareVersion
- Handles
- Handles_SetSourceHandleFromHandle
- ActionScript_SetProperty_String
- Handles_SetLegend

From:
https://www.avosupport.de/wiki/ - **AVOSUPPORT**

Permanent link:
https://www.avosupport.de/wiki/webapi/examples/playback_timestamp

Last update: **2024/08/24 08:59**