Web API example

Set Timecode Start from Palette fade

Set the Timecode start time for versions pre Titan v14. The challenge is that this reqires a TimecodeTime object but the required cast was only implemented in Titan v14. The workaround is to set the palette fade time (as you would do by simply entering a number) and then call a macro which uses this to set the timecode start time.

author, date	Gregory Haynes, February 2022
published	https://www.avolites.de/downloads/icke_siegen/SetTcStartTime/
prog. lang./ framework	HTML, JS, CSS; none (wrote everything with a text editor)
description	set the palette fade time, then call a macro to transfer this into timecode start time
other requirements	a way to issue POST requests, e.g. RestMan for Chrome

Screenshots

1. use RestMan (or another way to output a Post request) to set the palette fadetime

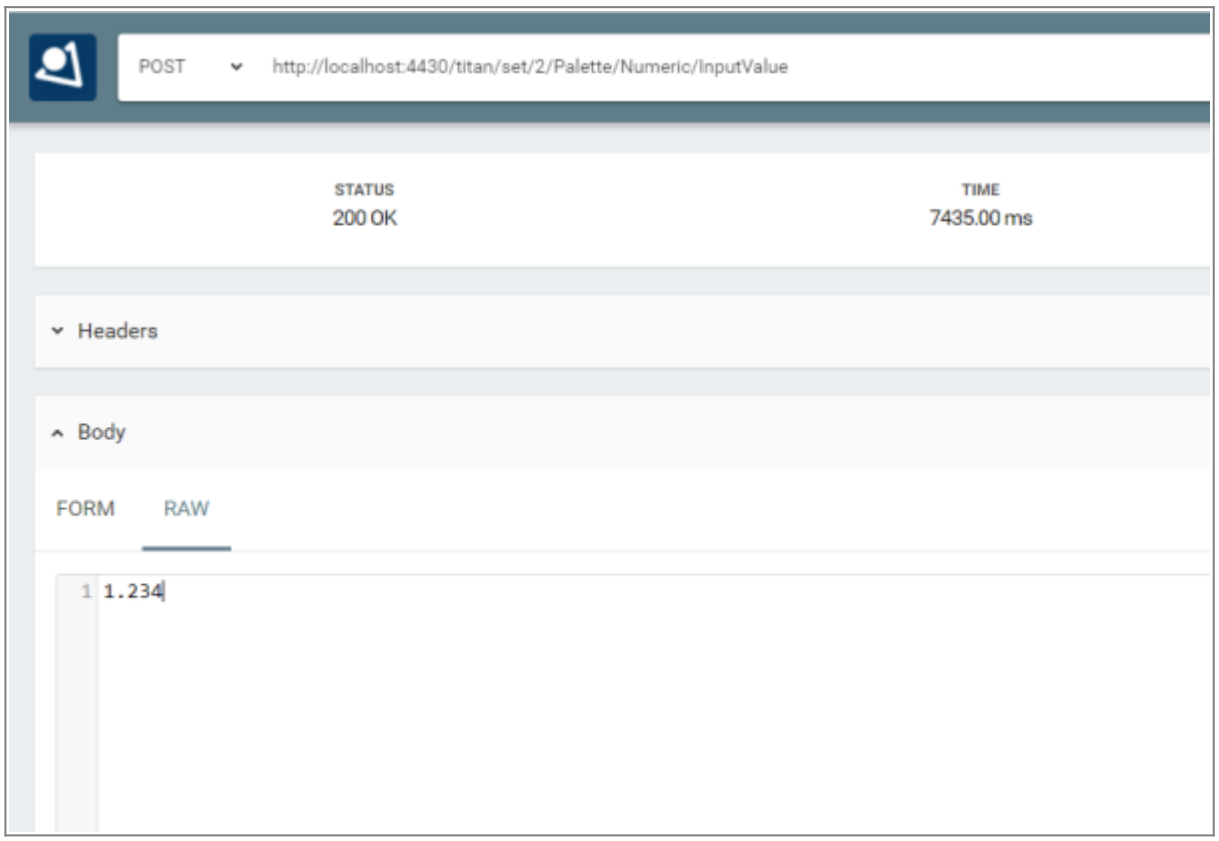

2. call a macro (here: Timecode - Set Start Time from Palette Fade to use the value as Timecode start time)



In order to call a macro via WebAPI it needs to be in the show library AND needs to be copied/moved to a handle.

3. the little html page at https://www.avolites.de/downloads/icke_siegen/SetTcStartTime/:

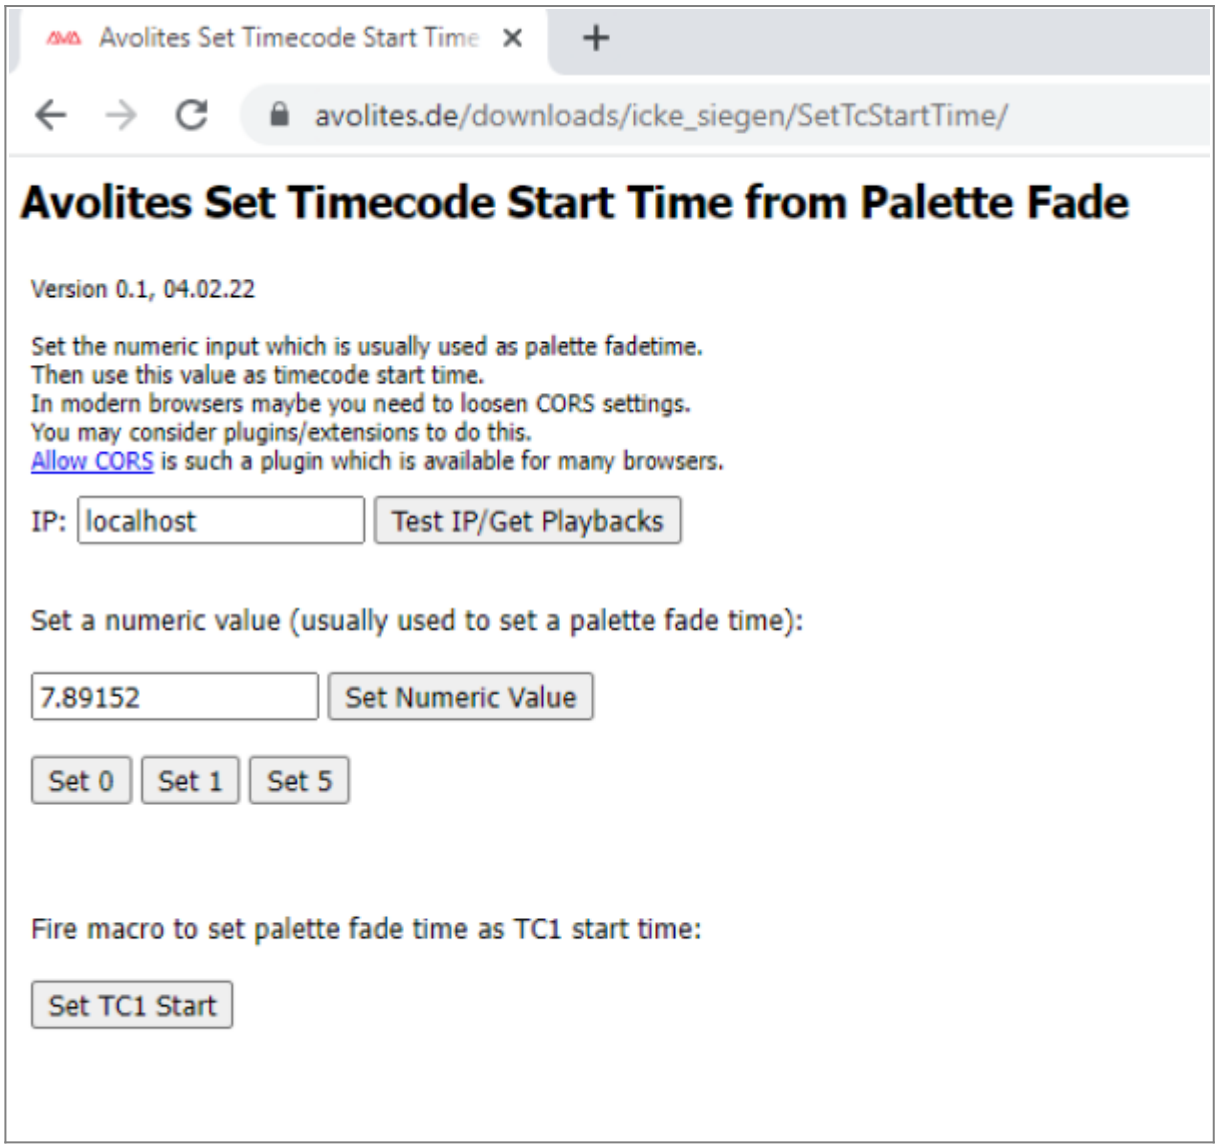

API Requests

- InputValue
- Run

From:
https://www.avosupport.de/wiki/ - **AVOSUPPORT**

Permanent link:
https://www.avosupport.de/wiki/webapi/examples/settimecodefrompalettefade?rev=1643981069

Last update: **2022/02/04 13:24**